

X 25 Year System Warranty

X Supports Gigabit Ethernet

X Built in Slide Label System

Features

- 25 Year System Warranty
- Built in Slide Label System
- Power Sum Compliant
- LSA Style Termination Blocks
- No.2 cabling system by market share, as reported by BSRIA
- Supports Gigabit Ethernet
- Category 5e compliant
- Choice of Port Density
- Pre Printed 1-96 Self Adhesive Labelling included

Product Overview

Excel Category 5e Patch Panels comply with the current standards for enhanced Category 5. Each panel offers a choice of labelling with the option to use the screen printed fields on the panel facia or the slide label system or pre printed 1-96 labelling scheme which is enclosed with each panel. Ease of installation is assured with built in rear cable management at a 90° angle to the panel facia. This tray also holds the LSA termination blocks. Cage nuts and mini cable ties are included with each panel.

Performance Overview


Excel Category 5e Patch Panels are manufactured to and tested to the current Category 5 enhanced standards as defined by the TIA and ISO standards' bodies. Swept frequency tests are applied to each critical performance characteristic, such as near end cross talk (NEXT) and far end cross talk (FEXT). Both Worst Case and Power Sum Test methods are applied. Actual performance exceeds the required standard by a considerable margin ensuring sufficient headroom for even the most demanding applications.

Performance / Specification Table

Specification	Category 5e
Wiring Specification	T568B
Port Density	24Ports Per 1U
Dimensions	482.3mm wide x 98.3mm deep x 44mm high
Installation Recommendation	Suits standard 19" rack
Dimensions	480mm wide x 44mm high x 96mm deep
RJ45 Jack	Min life 700 insertions
RJ45 Jack	50 Micro-inch Gold Plated contact pins
IDC Contacts	Suitable for LSA compatible tooling. Maximum 200 reterminations
Contact compatibility	22 to 26AWG Solid & 24AWG Stranded wires
Operating Temperature Range	-10°C to 60°C
Storage Temperature Range	-40°C to 68°C
Panel Material:	SPCC - Black Powder Painting Coat Finish
Plastic Frame:	ABS High Impact UL94V-0 Thermoplastic
Jack Housing:	PBT High Impact UL94V-0 Thermoplastic, 15% Glass Fibre Filled
IDC Plastic:	Polycarbonate High Impact UL94V-0 Thermoplastic
NEXT at 100MHz	Category 5e 34.8dB @100MHz (Power Sum)

Typical Applications

- 10Base-T Ethernet
- Token Ring
- 100BASE-TX Fast Ethernet
- 155 Mbps ATM
- 1000BASE-T Gigabit Ethernet
- 622 Mbps ATM

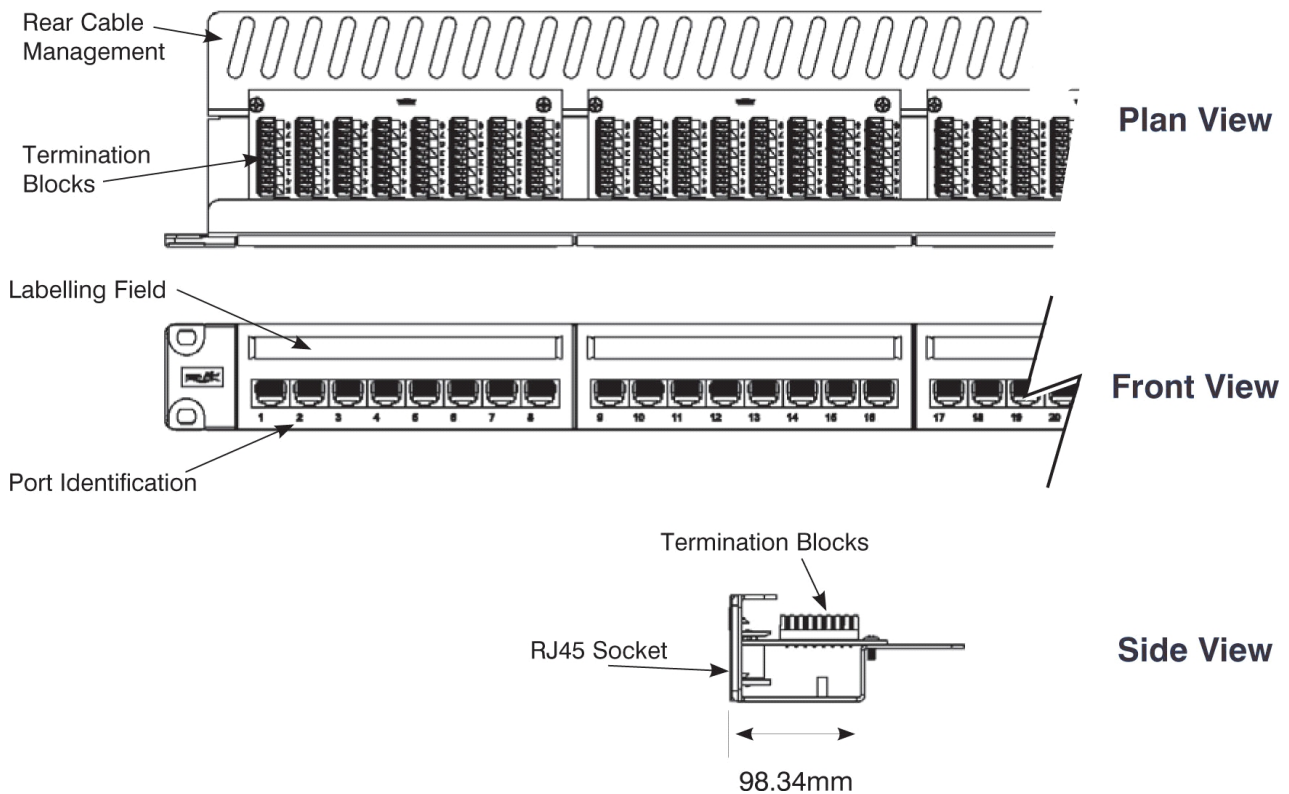

Part Number Information

Part No.	Description
100-470	Excel Plus Category 5e Unscreened Patch Panel, 24 Port 1U, Black
100-480	Excel Plus Category 5e Unscreened Patch Panel, 48 Port 2U, Black

Related Products

Part No.	Description
35-480	Punchdown tool, BT reference 2A

System Warranty

The Excel System Warranty provides a 25-year product and applications assurance of compliance with the industry performance standard appropriate to the class of cabling installed. The warranty may be applied for by an accredited Excel Partner who has designed, supplied and installed the said system.



axilan

c.so santorre di santarosa 36, cuneo, Cuneo, 12100, Italia

Tel: +390171692038

Email: info@axilan.it Web: www.axilan.it



AXILAN[®]
OPTICAL and COPPER WIRING